



Unique Water and Oil Hybrid Technology



Innovative Water and Oil Hybrid Stains

HyperTone[™] Stains utilize a proprietary water/oil hybrid technology to deliver high-quality pigment of unmatched depth and vibrance, bringing out the beauty of hardwood floors in commercial, residential, and sports environments. This first-of-its-kind formulation provides unrivaled color penetration, but with all the benefits of a waterbased stain.

Can Be Used as Stain or Tint

Use with compatible Basic Coatings products

Unlimited Colors

HyperTone Stain colors can be mixed and matched offering an unlimited color palette as Stain or Tint

Reduced Blotching

Stain is more uniform in color on tough to stain species

Easy to Apply

Use Roller

Non-Flammable


Stain rags of this product will not spontaneously combust; no need to fireproof used rags

Low Odor

Avoid issues associated with offensive fumes and is great for high rise and/or multi-family projects

Easy to Clean

Just use soap and water; no need for mineral spirits or other solvents

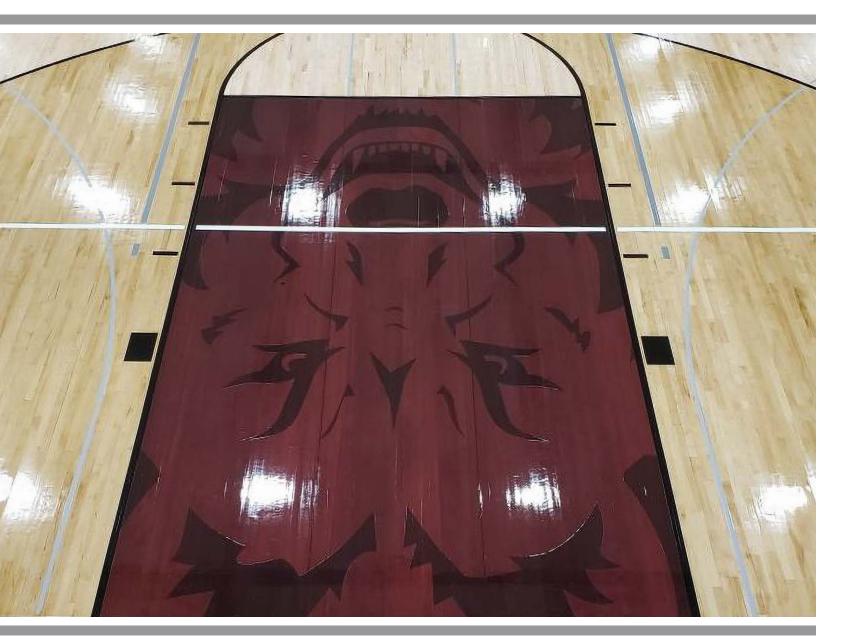

Regency Series







Primary Series







Additive / Dry Time Extender



Use up to 18 ounces of StainGlide[™] per gallon to help extend dry time, blend and reduce lap marks. Highly recommended when using as a stain; do NOT use when using as a tint.

Designer Series



















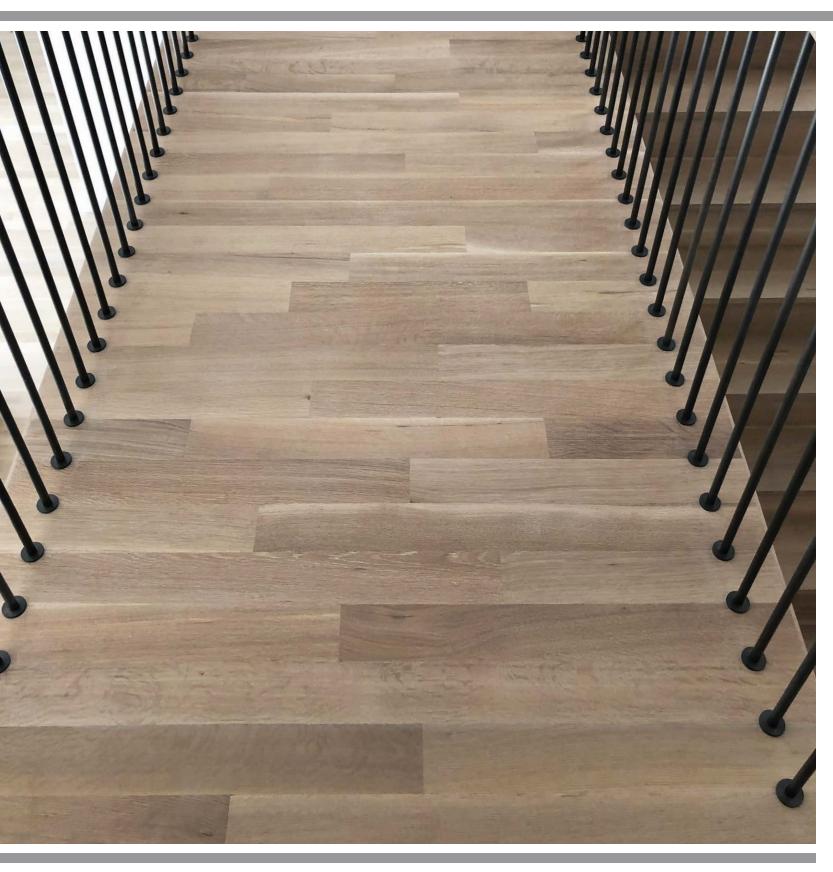

Regency Series

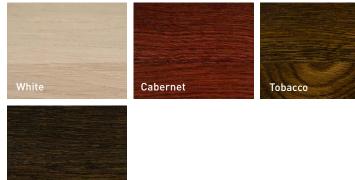

Designer Series

Slate







Primary Series



*p = parts

We try extremely hard to ensure our photos are as life-like as possible, but please understand the actual color may vary slightly.


Prior to beginning a project, apply in an inconspicuous area to test and become familiar with your complete application method and to ensure product satisfaction.

White Oak

Custom Series





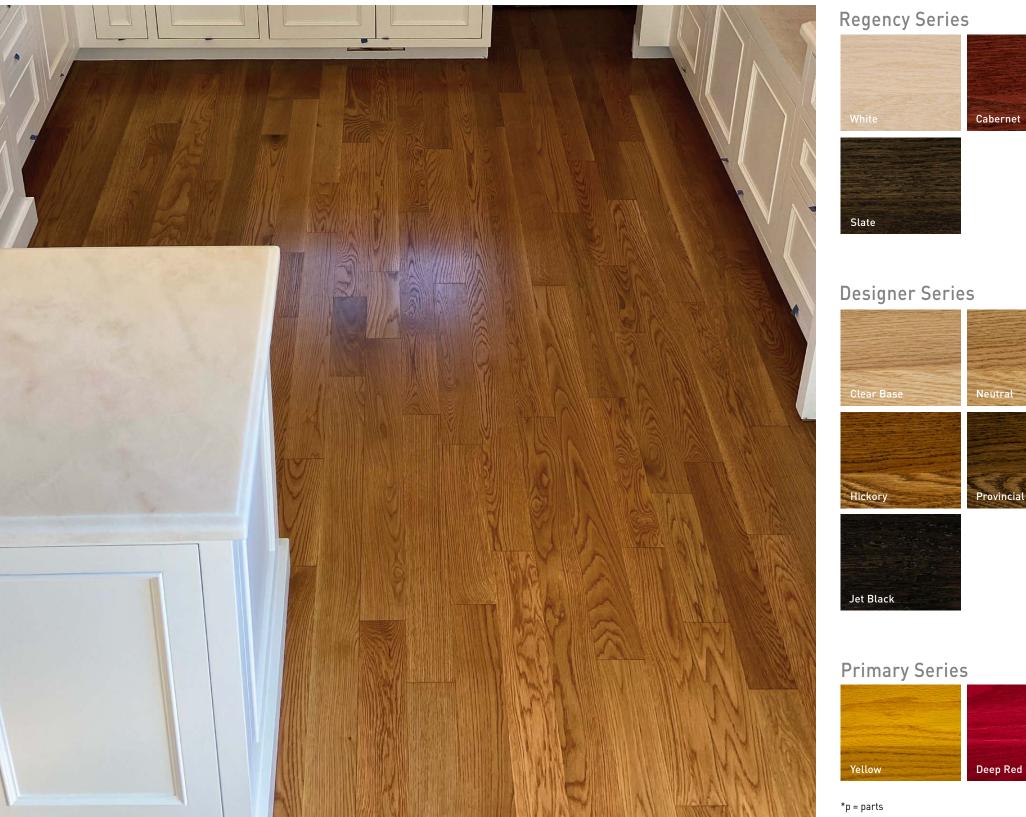

Red Oak








We try extremely hard to ensure our photos are as life-like as possible, but please understand the actual color may vary slightly.

Prior to beginning a project, apply in an inconspicuous area to test and become familiar with your complete application method and to ensure product satisfaction.

Custom Series



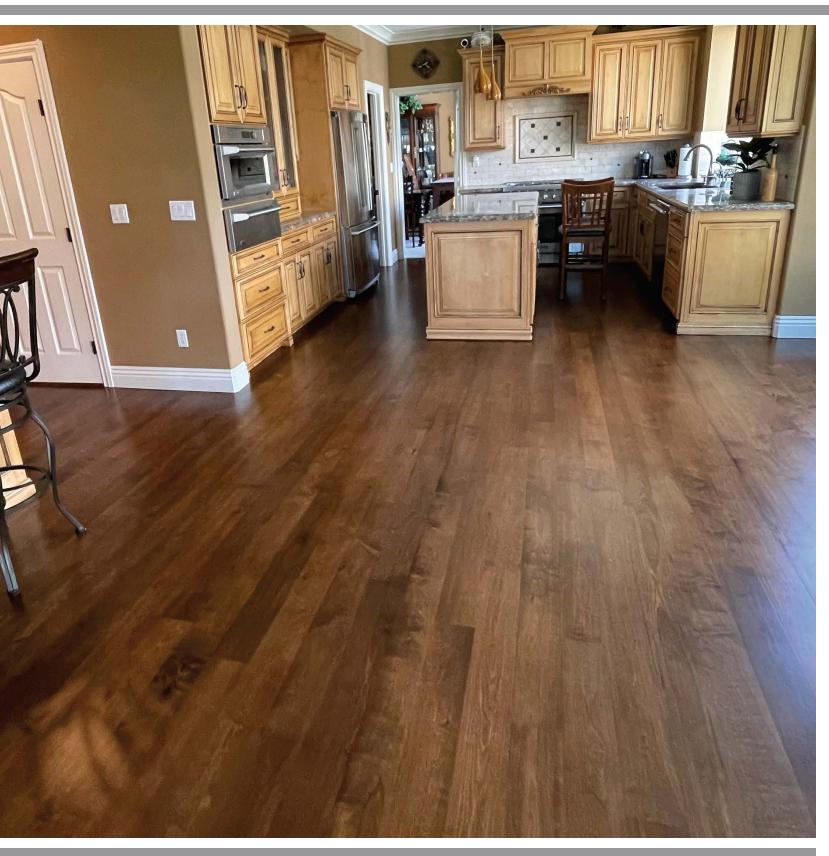

Regency Series



Designer Series

Slate



Primary Series



*p = parts

We try extremely hard to ensure our photos are as life-like as possible, but please understand the actual color may vary slightly.

Prior to beginning a project, apply in an inconspicuous area to test and become familiar with your complete application method and to ensure product satisfaction.

8

Maple

Custom Series

Orange 18p Yellow, 1p Deep Red

NC Blue 24p White, 1p Deep Red, 3p Blue

Custom Bp Provincial, 1p White, 9p Clear Base

Custom 1p Cabernet, 1p Yellow Green 4p Yellow, 1p Blue

Birch 2p White, 1p Provincial, 5p Clear Base

Custom 2p Slate, 2p White, 10p Neutral Purple 2p Deep Red, 1p Blue

Warm Grey 4p White, 1p Slate, 12p Clear Base

Custom 15p Hickory, 1p White

basic coatings



Custom

Brazilian Cherry



*p = parts

An unlimited range of custom colors can be mixed and used as stain or for tinting compatible Basic Coatings Waterbased Finishes.

Instructions for Mixing Stain

• Whether using one color, or blending custom colors, shake individual container(s) thoroughly prior to combining.

• Once combined, thoroughly mix.

• If more than one gallon (or pint) is needed or a custom color formula is being used, mix enough stain to do the entire project to ensure uniform color.

• After shaking, pour from original containers into a single larger container.

• Stir stain from time to time to prevent settling and help ensure uniform color.

Please refer to HyperTone™ Technical Data Sheet or Technical Bulletins for complete product application information.



HyperTone[™] Stains apply beautifully on maple gym floors and our primary colors (Red, Yellow, Blue) can be combined providing endless color options.







Scan QR Code for Tinted Finish Application



Application



©2022 Basic Coatings All Rights Reserved. 400 Van Camp Road Bowling Green, Ohio 43402 800-441-1934 basiccoatings.com Item #B9238-0112 | 03/22

For more information, contact your Basic Coatings® distributor, visit our website at www.basiccoatings.com or call us toll-free at 800-441-1934.